

**ME 801K**

**musikelectronic geithain**



STUDIO MONITORING SYSTEMS

HIGHEND LOUDSPEAKER

SOUND REINFORCEMENT SYSTEMS



**musikelectronic geithain**

**ME 801K**

# ME 801K

With the launch of the new 800 line, Musikelectronic Geithain opens a new chapter in the history of development of its studio and high-end loudspeakers. The new high-performance systems set sound and technology standards for both studio application and home audio. The experience from three decades of loudspeaker making was incorporated into the development of these products, applying well-proven and consequently refined solutions such as our *MCDs Coax (Minimum Colouration Directivity Steering Coax)* and our *K Technology (K = "Kardioid")*. Top-level quality is guaranteed due to complete fabrication in our Saxon manufacture.

The 3-way concept of the ME 801K consists of a 15-inch woofer system, a 6.5-inch high-performance midrange system and a tweeter array with three vertically arranged 1-inch tweeter calottes. The directivity of the system has been optimised for listening distances of between three and six metres, rendering a natural sound image in stereo and multichannel operation. One 1000 W and two 500 W amplifier modules supply the bass, mid and treble channels with sufficient power. The resulting overload safety ensures that even signals with highest peak levels are not limited. Also, sound pressure levels of up to 122 dB can be performed without audible distortions throughout the effective frequency range. A room compensation network, integrated into the amplifier electronics, allows control of the room-dependent frequency response.

With the 15-inch woofer, a directivity index is provided which will ensure realistic bass presence even at listening distances of up to six metres. Our reliable *K Technology* minimises rearward-directed room reflections in the bass range and simplifies the positioning of the ME 801K in the listening room.

The low-discolouration and low-distortion characteristics of the 6.5-inch high-performance midrange system result from the intelligent combination of several construction details. The cone loudspeaker, for example, runs without contact to the enclosure, thus avoiding the problem of cabinet resonances. Instead, the midrange system is operated with a rearward-directed acoustic flow resistor in order to achieve the desired directivity.

Frequently used wave guides in front of tweeter systems make directivity control easy. However, they tend to produce unavoidable discolourations due to short-time reflections on the inner horn surface. We take a different approach by using a tweeter array and doing without horn loudspeaker systems for sound level enhancement. The tweeter unit that is arranged coaxially in front of the midrange system guarantees the trademark low-colouration reproduction of sound events in our loudspeakers.

All these features make the ME 801K so unique on the loudspeaker market. It has been optimised for large listening distances and for acoustically less attenuated rooms.



## TECHNICAL PROPERTIES



### GENERAL

Active 3-way High-Performance-Loudspeaker for hearing distances between 3 and 6 m

MAXIMUM SPL  
TO IEC 268-1  
PROGRAMME MATERIAL

≥ 117 dB  
122 dB peak / r = 1 m (3.3 ft)

BANDWIDTH

25 Hz ... 22 kHz - 6 dB

CALIBRATION: ACOUSTIC OUTPUT LEVEL /  $P_e = -14$  dBu

90 dB / r = 1 m (3.3 ft)

DIRECTIVITY INDEX  
FROM 100 Hz ... 10 kHz

increasing from 4 to 10 dB

INHERENT NOISE SOUND LEVEL

≤ 10 dB (A) / r = 1 m (3.3 ft)

TOTAL HARMONIC DISTORTION  
MEASURED AT 100 dB / r = 1 m (3.3 ft)  
FROM 100 Hz ... 10 kHz

≤ -45 dB

NOMINAL INPUT LEVEL

+6 dBu adjustable

INPUT IMPEDANCE

≥ 10 kOhm RC symmetrically

ELECTRONIC CROSSOVER FREQUENCIES

550 Hz and 2.2 kHz

OUTPUT POWER PWM-AMPLIFIER

LF

max. 1000 Watt / 4 Ohm

MF

max. 500 Watt / 4 Ohm

HF

max. 500 Watt / 4 Ohm

POWER REQUIREMENTS

90 ... 132 V, 55 ... 65 Hz; 190 ... 265 V, 45 ... 55 Hz

POWER CONSUMPTION

30 VA at standby; max. 1000 VA at full load

MAINS CONNECTION

Euro cold-unit connector with HF-filter

OPERATION AND CLIPPING INDICATOR

LED on front side

INPUT CONNECTOR

XLR 3F (programme input)

OUTPUT CONNECTOR

XLR 3M (bass expansion)

LOUDSPEAKER SYSTEMS

WOOFER

1x 400 mm (15") cone

MID-RANGE UNIT

1x 160 mm (6") cone

TWEETER

3x 25 mm (1") dome

DIMENSIONS (H x W x D)

561 x 500 x 441 mm (22.1 x 19.7 x 17.4 in)

WEIGHT

48 kg (105.6 lbs)

TEMPERATURE REQUIREMENTS

FOR USE

+15°C ... +35°C (59°F ... 95°F)

FOR STORAGE

-25°C ... +45°C (-13°F ... 113°F)




HUMIDITY

45 ... 75 %

DESIGN OF THE CABINET

MDF-wood in ash black veneered,  
different veneers or colors optional

# Acoustic diagrams

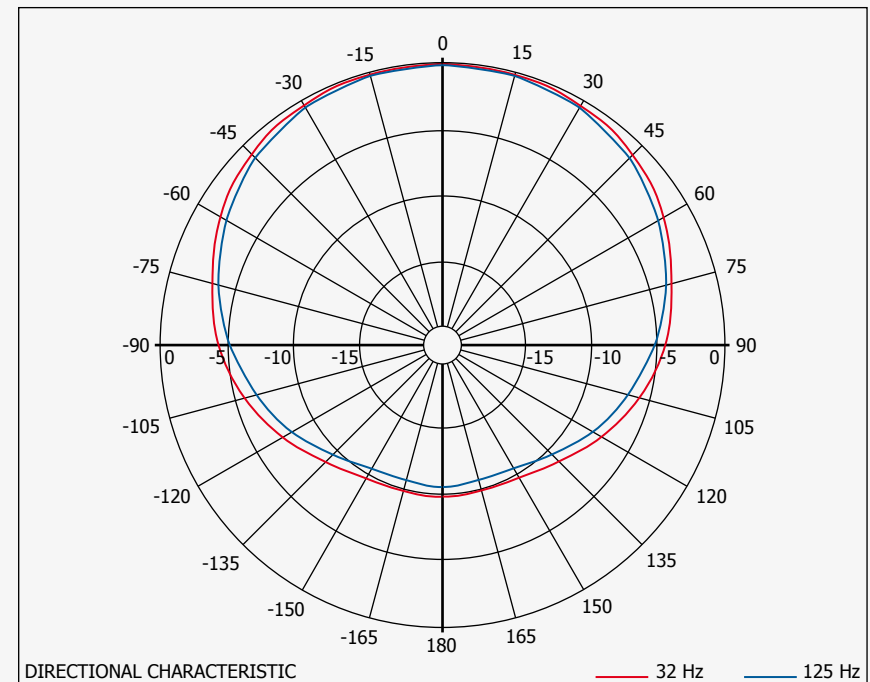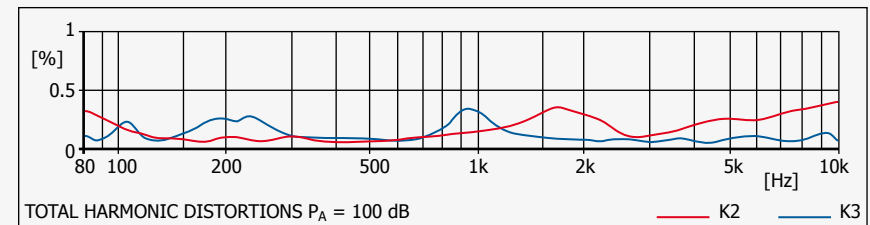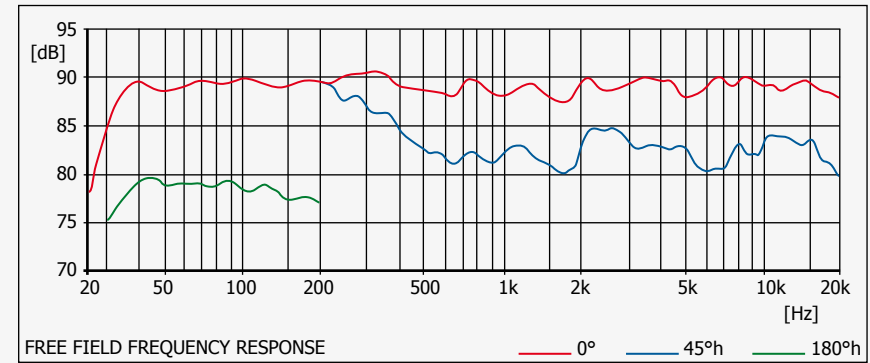

**musikelectronic geithain gmbh**

STUDIO MONITORING - HIGHEND LOUDSPEAKER - SOUND REINFORCEMENT SYSTEMS

Nikolaistraße 7  
04643 Geithain / Germany

Tel: +49 (0) 34341 3110  
Fax: +49 (0) 34341 31144

E-Mail: [info@me-geithain.de](mailto:info@me-geithain.de)

[www.me-geithain.de](http://www.me-geithain.de)